


Dash	A	B	C	Element
1	3	.187	36"	100 Ohms
2	3	.187	36"	500 Ohms
3	3	.187	36"	1000 Ohms
4	6	.125	36"	100 Ohms
5	6	.125	48"	1000 Ohms

LTR	DESCRIPTION	BY	DATE

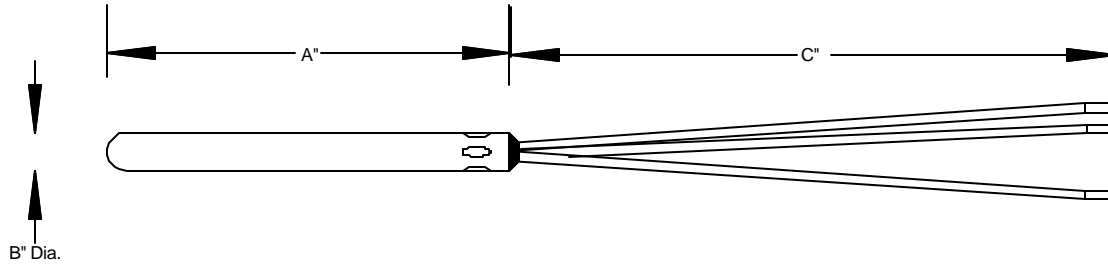

ELEMENT:


Platinum Resistance Thermal Detector (PRTD):
 Resistance: See Table
 Tolerance: $\pm .12\%$ @ 0°C Class B
 Temperature Coefficient: $.385\%/^{\circ}\text{C}$ from 0 to 100°C
 Operating Temperature: -40 to 250°C
 Maximum Operating Current: 10MA RMS
 Stability: $.25\%$ of Maximum exposed temperature for one year of service
 Repeatability: 0.1% after 10 cycles of full temperature range

Construction:

Strain Relief: Four point crimp with epoxy end seal.

Sheath: Stainless Steel type 300.

Wire: 22AWG stranded teflon. 2 Red 1 White.



--- TOLERANCES UNLESS OTHERWISE SPECIFIED ---

SHEATH LENGTH +/- .100

LEAD LENGTH +/- .25 OR 2% WHICHEVER IS GREATER

WIRE STRIP +/- .125

Drawn	JJB
Approved	
Date	05-13-02
Scale	NA


QUANTEM[®]
 CORPORATION
TRENTON, NEW JERSEY

Title
IMMERSION STYLE PROBE

Features/Model		RTD 3 WIRE	
Drawing Number		223-11331	
Revision			