


DASH	A	ELEMENT / CURVE	LTR	DESCRIPTION	BY	DATE
1	72"	2252 OHM / J				
2	60"	10000 OHM / J				
3	72"	50000 OHM / J				

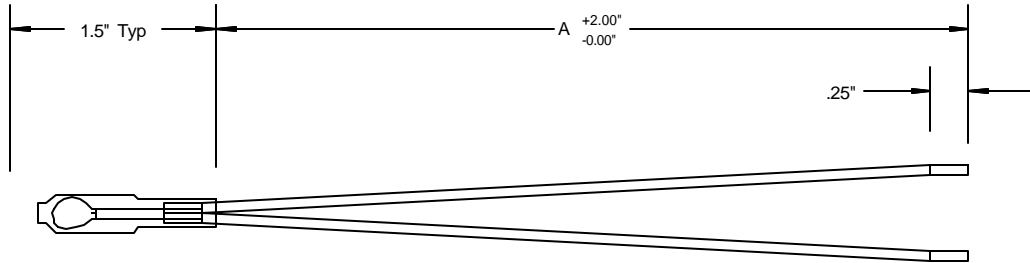

ELEMENT:

Thermistor Type - NTC
 Thermal Time Constant: 1 sec max in well stirred oil
 or 10 seconds in air.
 Dissipation Constant: 1mW/°C
 Maximum Power Rating: 30mW/°C derated to 1mW at 125°C
 Operating Temperature: -80°C to 150°C\

Construction:

Strain Relief: PVC Shrink
 Sheath: PVC Sleeve
 Wire: 22/7 Type E Black.

--- TOLERANCES UNLESS OTHERWISE SPECIFIED ---

SHEATH LENGTH +/- .100 LEAD LENGTH +/- .25 OR 2% WHICHEVER IS GREATER WIRE STRIP +/- .125

Drawn JJB	 <small>TRENTON, NEW JERSEY</small>	Features/Model TEFLON SLEEVE		
Approved		Drawing Number 223-40193	Revision	
Date 05-23-01		Title POLY. SLEEVE ASSY		
Scale N/A				