


Dash	A	Element
1	36"	10000 OHM / J
2	36"	5000 OHM / J
3	36"	10000 OHM / G

LTR	DESCRIPTION	BY	DATE

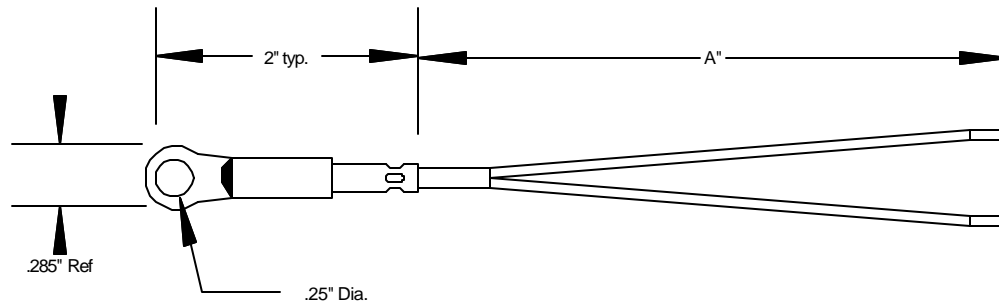

ELEMENT:

Thermistor Type - NTC

Thermal Time Constant: 1 sec max in well stirred oil
or 10 seconds in air.

Dissipation Constant: 1mW/°C

Maximum Power Rating: 30mW/°C derated to 1mW at 125°C

Operating Temperature: -80°C to 150°C

Construction:

Strain Relief: Four point crimp with fibergals strain relief.

Sheath: Stainless Steel type 300.

Ring Lug: Copper / Zinc

Wire: 22AWG stranded teflon.

--- TOLERANCES UNLESS OTHERWISE SPECIFIED ---

SHEATH LENGTH +/- .100

LEAD LENGTH +/- .25 OR 2% WHICHEVER IS GREATER

WIRE STRIP +/- .125

Drawn	JJB
Approved	
Date	05-13-02
Scale	NA


 TRENTON, NEW JERSEY
SURFACE MOUNT - SMALL

Features/Model	
Drawing Number	223-40194
Revision	