




609.883.9191 WWW.QUANTEMCORP.COM
 1457 LOWER FERRY ROAD, TRENTON NJ 08618

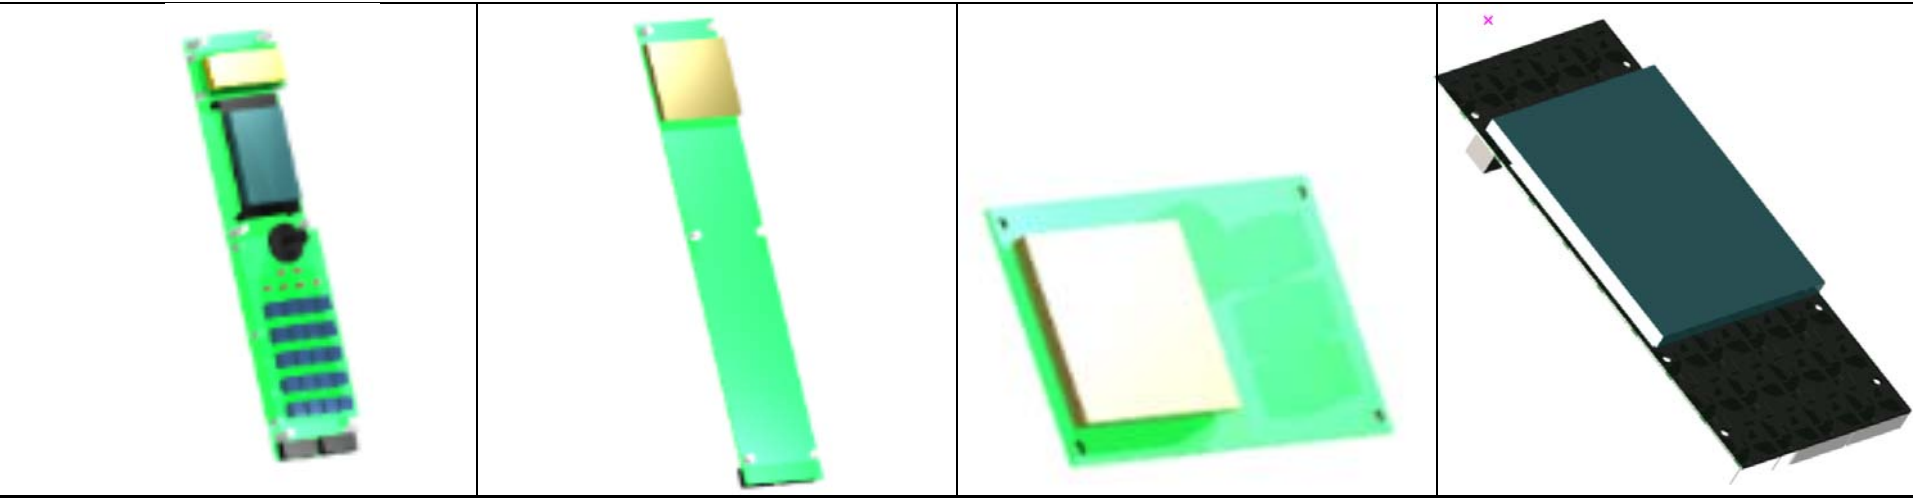

Series 160, 170, and 180

Modular Interface Systems and Stand Alone Product Line For Commercial Heating and Cooling Applications.

Model	160	160	160	170	180
Description	SERIES 160 POWER SUPPLY AND I/O BOARD ASSEMBLY	MODEL 160 TFT 64 COLOR CUSTOM FSLCD DISPLAY WITH OPT. KEYBOARD	MODEL 160 TFT 3.2" QVGA TOUCH SCREEN	SERIES 170 24V 3XPRB 3XK ALARM SDCARD USB I2C	SERIES 180 24V 8XPRB 3XK ALARM SDCARD USB I2C
P/N	232-00138-01	232-00136-01	232-00141-01	170-2322-30231-111-000	180-2861-31411-131-000
Display	-	COLOR FSLCD	3.2" QVGA	3.2" QVGA	5.7" VGA
Size	-	1.9" X 2.9"	320 x 240	320 x 240	640 x 480
Colors	-	64	8 bit	8 bit	16 bit
Landscape	-	-	X	X	X
Portrait	-	X	-	-	X
FLASH SST25	-	-	-	X	X
LCC DISPLAY	-	-	X	-	-
EPSON DISPLAY CONTROLLER	-	-	-	-	X
EXTERNAL DISPLAY MEMORY	-	-	-	-	X
Machine I/F Option	-	232-00138-01	232-00138-01	None	Optional 232-00138-01
Probe Inputs Resistive	5	-	5	3	8
Digital Inputs	5	-	5	2	6
Service Switches	-	-	4	2	1
On Board Relays	9	-	0	3 (Note 1)	3
OC Relay Drivers	-	-	-	3 (Note 1)	4
OC Outputs	3	-	-	2	4
Service LED's	-	-	3	3	1
On Board Alarm	100 db	-	-	100 db	100 db
External Alarm	X	-	-	X	X
SD Card	-	X	X	X	X
USB HOST	-	X	X	-	X
USB OTG	-	X	X	X	X
I2C	-	X	X	X	X
Size	3.125" x 13.50"	3.125" x 13.50"	3.125" x 13.50"	3.10" x 6.30"	4.05" x 9.00"

Note 1: The total number of Relays and Relay OC Drives may not exceed 3.